
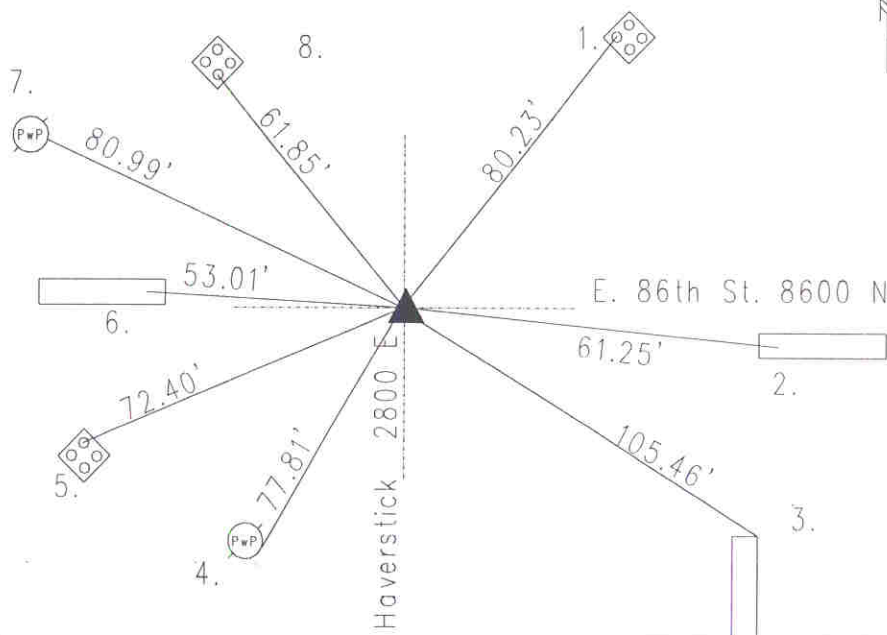


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 19 TOWNSHIP 17 RANGE 4
DATE: 4-19-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 3-4-00

IN. S.P.C. E ZONE NAD '83
NAME: 17041902
N: 517886.4520(m)
E: 61468.3230(m)

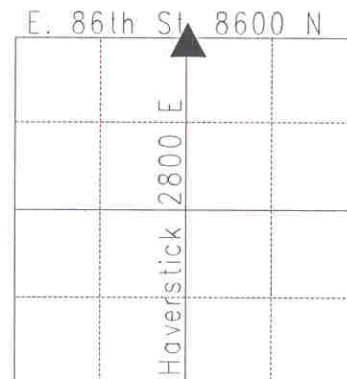

Corner originally set as a post in 1821 by Wm. B. Laughlin with the following witnesses: 12" beech bearing north 74 degrees, thence west 10 links; and a 7" hickory bearing 30 degrees, thence east 27 links. (M.C. Atlas p. 12) A survey by H.B.Fatout on April 4, 1884 indicates no stone or witnesses. (Washington Legal Book p. 77) Corner referenced by Woerner on 6/22/48 and called a copper pin. Corner referenced by Miller on 10/1/48 and called a copper pin. Corner referenced by Monroe on 11/3/60 and called a brass plug. Corner referenced by MCS on 2/27/62 and called a brass plug. Corner referenced by Wilcoxon on 1/29/76 and called a brass plug. Corner referenced by Wilcoxon on 6/3/86 and called a P.K.nail. Corner referenced by Wilcoxon on 4/27/86 and called a P.K.nail. Corner referenced by Wilcoxon on 8/27/95 and called a P.K. nail over brass plug. Corner referenced by Wilcoxon on 3/4/200 and called a P.K. nail over brass plug. Corner was excavated on 4/11/03 and a brass plug was found 6" down. No other points were found. A #205 cast iron Harrison Monument was set in position as the corner.

17041902

REF.	DISTANCE	DESCRIPTION
1.	80.23'	Cut 'x' W-bolt of aluminum pole base
2.	61.25'	Cut 'x' W-end of median
3.	105.46'	NE corner of concrete sign
4.	77.81'	PK nail SE PwP#60-210 B 18"up
5.	72.40'	Cut 'x' N-bolt of aluminum pole base
6.	53.01'	Cut 'x' E-end of median
7.	80.99'	Road nail E PwP#54-210 B 2" up
8.	61.85'	Cut 'x' S-bolt of aluminum pole base